


PESO EXATO
balanças

LOAD CELL:
TYPE PE-BSPLT

CAPACITY:
200 TO 250KG

COMPATIBLE VISHAY 1022
SCREW: M8

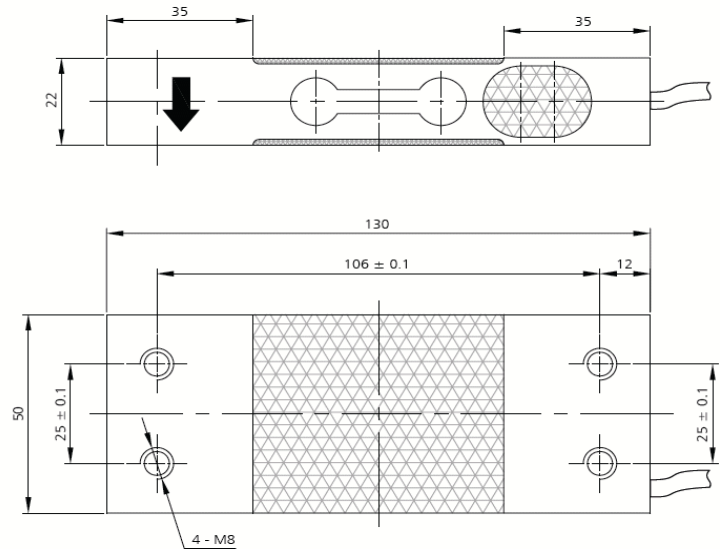

LOAD CELL CALIBRATION CERTIFICATE

MODEL	200-250kg
PRECISION CLASS	C3
CABLE LENGTH	50 CM
OUTPUT SIGNAL	2.0 0.01 mV/V
ZERO OUTPUT SIGNAL	<1% of R.O.
REPEATABILITY ERROR	<0.020 % of R.O.
CREEP (30 MIN).	<0.025 % of R.O.
TEMPERATURE EFFECT ON ZERO	<0.020 % of R.O.
INPUT IMPEDANCE	410 ± 15 Ω
OUTPUT IMPEDANCE	350 ± 5 Ω
INSULATION IMPEDANCE	≥5000 MΩ
MAXIMUM INPUT VOLTAGE	15V
NOMINAL TEMPERATURE RANGE	-10...+40 °C
OPERATING TEMPERATURE RANGE	-30...+70 °C

WIRING DIAGRAM

