


**PESO EXATO**  
balanças

LOAD CELL:  
**TYPE PE-BSPLT**

CAPACITY:  
**4 TO 8KG**

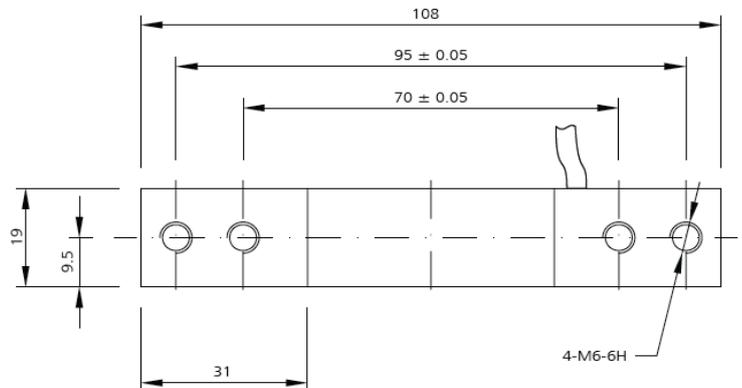

**COMPATIBLE PE-BSPLT**  
**SCREW: M6**

**LOAD CELL CALIBRATION CERTIFICATE**

MODEL	4-8kg
PRECISION CLASS	C3
CABLE LENGTH	3 M
OUTPUT SIGNAL	2.0 0.01 mV/V
ZERO OUTPUT SIGNAL	<1% of R.O.
REPEATABILITY ERROR	<0.020 % of R.O.
CREEP (30 MIN).	<0.025 % of R.O.
TEMPERATURE EFFECT ON ZERO	<0.020 % of R.O.
INPUT IMPEDANCE	410 ± 15 Ω
OUTPUT IMPEDANCE	350 ± 5 Ω
INSULATION IMPEDANCE	≥5000 MΩ
MAXIMUM INPUT VOLTAGE	15V
NOMINAL TEMPERATURE RANGE	-10...+40 °C
OPERATING TEMPERATURE RANGE	-30...+70 °C

**WIRING DIAGRAM**

